

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 962 132 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
08.12.1999 Bulletin 1999/49

(51) Int. Cl.<sup>6</sup>: **A01M 1/20, A61L 9/03**

(21) Application number: **99110590.9**

(22) Date of filing: **01.06.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Zobele, Franco**  
**38100 Trento (IT)**

(74) Representative:  
**Faggioni, Marco, Dr. Ing. et al**  
**Fumero Studio Consulenza Brevetti**  
**Franz-Joseph-Strasse 38**  
**80801 München (DE)**


(30) Priority: **05.06.1998 IT MI981276**

(71) Applicant:  
**ZOBELE INDUSTRIE CHIMICHE S.p.A.**  
**I-38100 Trento (IT)**

(54) **Electric evaporator for insecticides or perfumes in liquid formulations with device to adjust the evaporation intensity**

(57) An electric evaporator for insecticides or perfumes in liquid formulations comprises a housing (1), an eventually revolving plug (2), an electric heating device (4), and a bottle (F) containing the liquid formulation, provided with a wick (S). The bottle (F) is held into a bottle holder (5), rectilinearly sliding in respect of the housing (1) in a direction parallel to the axis of the wick (S), said bottle holder (5) also comprising a cylindrical portion (6) connected in a screw-and-nut relationship to an annular control bush (8), apt to be operated externally to the evaporator so as to control the rectilinear sliding motion of said bottle holder (5).

**FIG. 1**

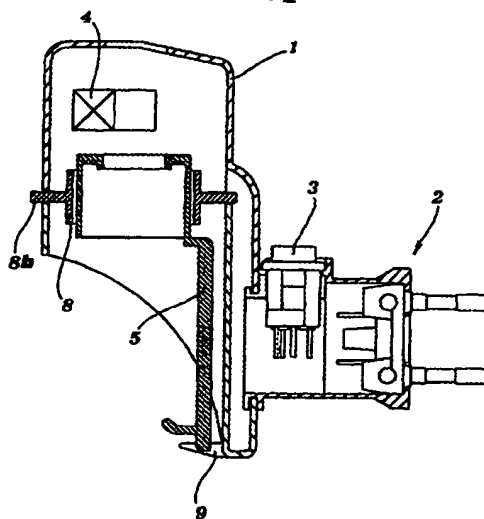

**EP 0 962 132 A1**

supply an electric evaporator for liquid formulations - particularly liquid formulations contained in bottles having a non-circular section - wherein it may be possible to continuously change the position of the wick for the liquid formulation, in respect of the heating device of the evaporator, so as to obtain an adjustment of the evaporation intensity without having to cause any rotation of the bottle and, furthermore, with a comfortable and easily accessible control in any position of the evaporator.

[0015] Another object of the present invention is to supply an evaporator wherein the bottle is firmly and steadily held in position - in the desired position of adjustment - independently from any impacts or shakes which may be imparted on the evaporator.

[0016] According to the present invention, said objects are reached by means of an electric evaporator for insecticides or perfumes in liquid formulations - of the type comprising a housing, an eventually revolving plug, an electric heating device and a bottle containing the liquid formulation, provided with a wick - characterized in that said bottle is held into a bottle holder, rectilinearly sliding in respect of the housing in a direction parallel to the axis of the wick, said bottle holder also comprising a cylindrical portion connected in a screw-and-nut relationship to a control bush apt to be operated externally to the evaporator so as to control the rectilinear sliding motion of said bottle holder.

[0017] The present invention will now be described in further detail, with reference to the accompanying drawings, in which:

Fig. 1 is a longitudinal section view of the evaporator according to the invention, without the bottle containing the liquid formulation;

Fig. 2 is a front elevation view of the evaporator shown in fig. 1;

Fig. 3 is a rear elevation view of the evaporator shown in fig. 1;

Fig. 4 is a plan view of the evaporator shown in fig. 1;

Fig. 5 is a front view of the bottle holder;

Fig. 6 is a plan view of the bottle holder;

Fig. 7 is a lateral view of the bottle holder;

Fig. 8 is a front view of the control bush;

Fig. 9 is a cross section view of the bottle holder of fig. 7;

Fig. 10 is a cross section view of the control bush shown in fig. 8;

Fig. 11 is a cross section view of the elements shown in figs. 9 and 10, in a mounted position;

Figs. 12, 13 and 14 are views similar to that of fig. 1, showing three successive steps of the insertion of the bottle containing the liquid formulation into the evaporator; and

Figs. 15 and 16 are views similar to that of fig. 1, showing the bottle inserted in a position of maximum and, respectively, minimum evaporation intensity.

[0018] With reference to figs. 1 and 2, the evaporator according to the present invention consists of a housing 1 to which there is fixed, freely rotatable and in known manner, a unit comprising a plug 2 and a switch 3, suited to allow plugging the evaporator both into horizontal and into vertical current taps.

[0019] A heating device 4 is fixed by conventional means into the upper part of the housing 1, and preferably - but not necessarily - comprises a ceramic support incorporating a resistor or a posistor (PTC), electrically connected to the pins of the plug 2 through the switch 3. Electric connections of this type are widely known in technique and are thus not illustrated on the drawing to make it clearer. The shape of the heating device 4 - as shown in the plan view of fig. 4 - is such that the seat for the wick S of the bottle F has an open section, for example U-shaped, to allow an easy insertion of the bottle F, as better described hereinafter.

[0020] The central part of the housing 1 holds the unit supporting the bottle F, which consists of a bottle holder 5 and of a bush 8 controlling the same. The structure of these two elements of the evaporator is illustrated in further detail in figs. 5 to 11. As clearly shown on said drawings, the bottle holder 5 comprises a cylindrical portion 6 connected to a vertical side member 7, and preferably formed in one piece therewith through a conventional molding process of a plastic material. A helicoidal rib 6a is formed onto the outer surface of the cylindrical portion 6, in one piece therewith, while two wings 7a laterally project from the side member 7, with an inclination towards the front part of the evaporator, and a bracket 7b projects from the lower part of the evaporator. As shown in the cross section views - wherein, for simplicity, the wings 7a have been removed - the cylindrical portion 6 is pierced at the top, to allow the passage of the wick S of the bottle F, and is provided there with the usual means for centering the wick.

[0021] The control bush 8 consists of an annular cylindrical body, apt to engage with the cylindrical portion 6 and comprising, for the purpose, an inner helicoidal rib 8a, preferably formed in one piece with the bush 8. The pitch of the rib 8a obviously corresponds to that of the rib 6a, so as to ensure a proper engagement between the cylindrical portion 6 and the control bush 8. Said bush is moreover provided with an external flange 8b of wider diameter, kept in position into suitable seats formed therefor into the housing 1, and partially projecting from the front wall of said housing - as can be seen from figs. 1 and 4 - so that its rotation may be easily controlled by the user.

[0022] When the bottle holder 5 is inserted into the housing 1, the wings 7a projecting from the side member 7 get into sliding contact with the sidewalls of said housing, hence allowing the bottle holder 5 to perform only a rectilinear sliding motion in a direction parallel to the axis of the wick S. Any rotary motion of the control bush 8 thus turns - thanks to the screw-and-nut relationship between the ribs 8a and 6a - into a motion of axial

translation of the entire bottle holder 5, thereby allowing to reach the object of the invention. As shown on the drawings, the rib 6a, unlike the rib 8a, has a remarkable extension in height; in this way, the rib 6a is in fact able to cooperate not only with the rib 8a but also with the whole inner wall of the control bush 8, thus providing a reliable, steady and smooth control of the movement of the bottle holder 5.

[0023] The mounting of the bottle F into the bottle holder 5 is shown in figs. 12 to 14. A first step (fig. 12) involves introducing the bottle F into the cylindrical portion 6 of the bottle holder 5, making sure to avoid the obstacle formed by the bracket 7b; in this step, the wick S, being inclined in respect of a vertical direction, can be easily inserted into the U-shaped seat provided therefor in the heating device 4. A second step (fig. 13) involves pushing the bottle F upwards, towards its vertical position, by pressing its lower portion against the bracket 7b and elastically deforming the side member 7 until the bottle has taken up a perfectly vertical position. In this last step (fig. 14), the bracket 7b, - the positioning of which along the side member 7 is planned so as to exactly reproduce the size of the sidewall of the bottle F - is released from the edge of the bottle F and moves back to its initial position, thanks to the elasticity of the side member 7, fitting onto the bottom of the bottle F and thus positively blocking it inside the evaporator, independently from any subsequent handling, or even tilting, to which it will be subjected during use. To remove the empty bottle F, it will then be sufficient to manually shift the side member 7 in the position of fig. 14, grasp the bottle F and pull it downwards and in a direction away from the plug 2, so as to step back into the positions shown in fig. 13 and, respectively, fig. 12.

[0024] Figs. 15 and 16 finally show the two end positions of the bottle holder 5 - with the bottle F and the wick S inserted therein - determined by the rotation of the control bush 8. Fig. 15 shows the position of maximum evaporation, wherein the wick S is in its highest position and thus receives a higher amount of heat from the heating device 4. Since, in fact, the heat let out by said device produces a hot air stream flowing upwards, the wick S is affected by said stream throughout its length L. Acting now on the rotation of the control bush 8, the bottle holder 5 moves down, up to reaching the bottom end position shown in fig. 16, in which the stretch of wick influenced by the hot air stream is of reduced length l, and which thus corresponds to the position of minimum evaporation.

[0025] The upper end position of the bottle holder 5 is determined by the contact between the shoulder of the side member 7 and the bush 8, while the lower end position is determined by the contact between the bracket 7b and a pair of stop pins 9 projecting from the bottom part of the housing 1, the side member 7 being freely inserted between said stop pins, as shown in Fig. 2.

[0026] From the previous description, it appears quite

evident how the present invention has fully reached the intended objects. The heretofore described evaporator allows in fact to use a bottle having any shape, even highly irregular, seen that said bottle is connected to the evaporator merely in correspondence of its neck (forcibly circular, as it is meant to house the closing cap) and of its bottom part. A bottle of this type can thus be freely moved in a rectilinear direction, parallel to the wick, so as to vary the stretch of wick affected by the hot air stream produced by the heating device 4 and thus, in the end, the amount of active substance spread out per unity of time.

[0027] Moreover, the configuration of the device is such that the bottle keeps in a steady position however the user may handle the evaporator. Equally steady is the axial position of the bottle, determined by the rotation of the control bush 8; in fact, since the screw-and-nut control of this latter is not of the reversible type, the position of the bottle F cannot be varied accidentally - for example, by imparting a pressure onto the bottom of the bottle - but only, and exclusively, through rotation of the annular flange 8b forming part of the control bush 8.

#### Claims

1. Electric evaporator for insecticides or perfumes in liquid formulations - of the type comprising a housing (1), an eventually revolving plug (2), an electric heating device (4), and a bottle (F) containing the liquid formulation, provided with a wick (S) - characterized in that said bottle (F) is held into a bottle holder (5), rectilinearly sliding in respect of the housing (1) in a direction parallel to the axis of the wick (S), said bottle holder (5) also comprising a cylindrical portion (6) connected in a screw-and-nut relationship to a control bush (8), apt to be operated externally to the evaporator so as to control the rectilinear sliding motion of said bottle holder (5).
2. Electric evaporator as in claim 1), wherein said cylindrical portion (6) of the bottle holder (5) forms the seat for the bottle neck.
3. Electric evaporator as in claim 2), wherein said cylindrical portion (6) of the bottle holder (5) comprises an outer helicoidal rib (6a).
4. Electric evaporator as in claim 3), wherein said control bush (8) consists of an annular cylindrical body, externally engaging with the cylindrical portion (6) of the bottle holder (5), and comprises an inner helicoidal rib (8a) connected in a screw-and-nut relationship to the outer rib (6a) of said cylindrical portion (6).
5. Electric evaporator as in claim 4), wherein said control bush (8) comprises an external widened annular engagement flange (8b) projecting from the front

wall of the housing (1) of the evaporator.

6. Electric evaporator as in claim 1), wherein the sliding portion of said bottle holder (5) consists of a side member (7), connected to said cylindrical portion (6), so as to be elastically deformable in respect thereof, in order to allow introducing and removing the bottle (F). 5
7. Electric evaporator as in claim 6), wherein said side member (7) comprises a projecting bracket (7b), apt to elastically engage the bottom of the bottle (F). 10
8. Electric evaporator as in claim 6), wherein said side member (7) is provided with two laterally projecting wings (7a), apt to slidingly engage with the inner sidewalls of the housing (1). 15
9. Electric evaporator as in claim 1), wherein said housing (1) comprises, in its bottom part, a pair of projecting pins (9), apt to form the lower stops for said bottle holder (5). 20
10. Electric evaporator as in claim 6), wherein said side member (7) comprises a shoulder which connects it to said cylindrical portion (6) and is apt to form the upper stop for said bottle holder (5) in abutment against said control bush (8). 25

30

35

40

45

50

55

FIG. 2

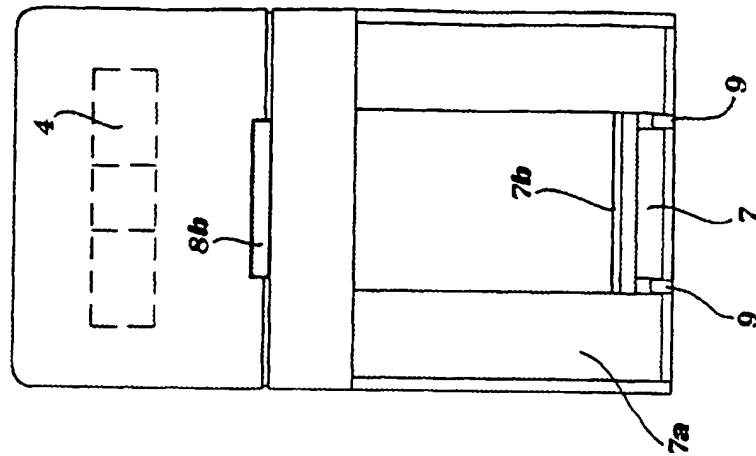


FIG. 1

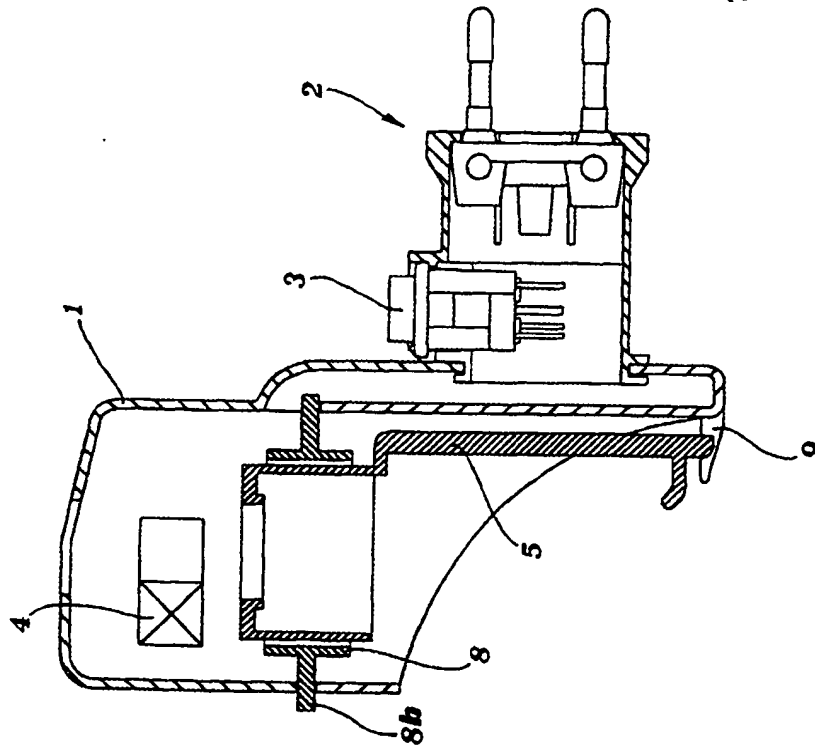


FIG. 3

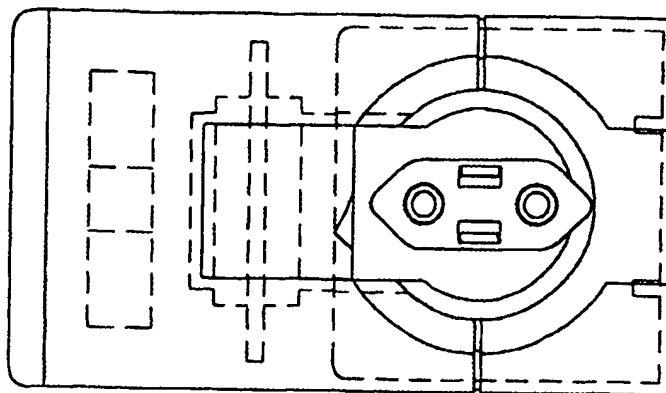


FIG. 8

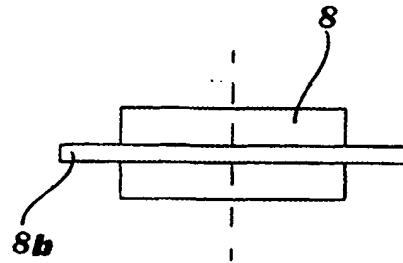


FIG. 7

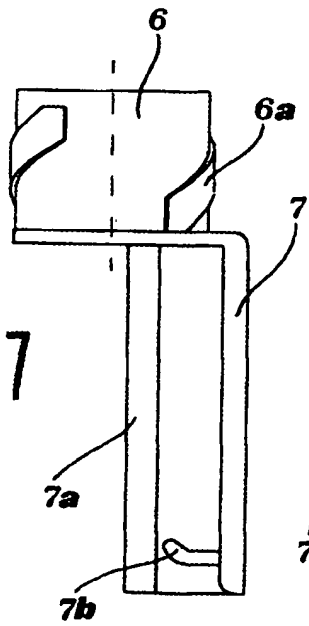


FIG. 5

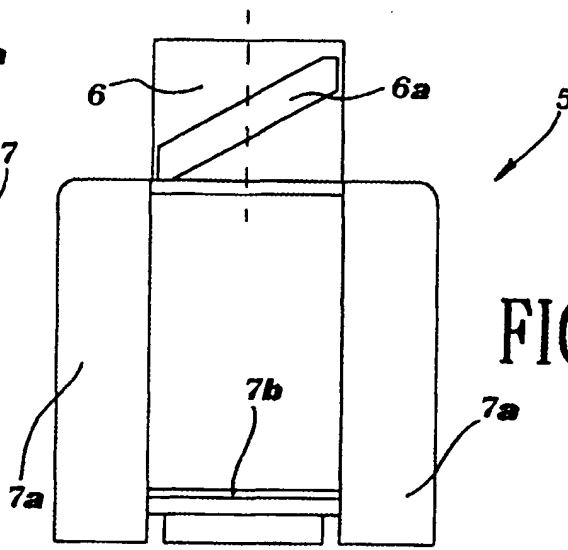
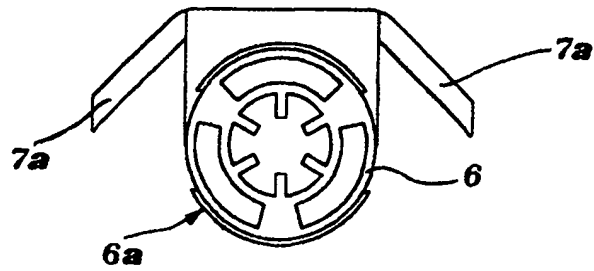


FIG. 6



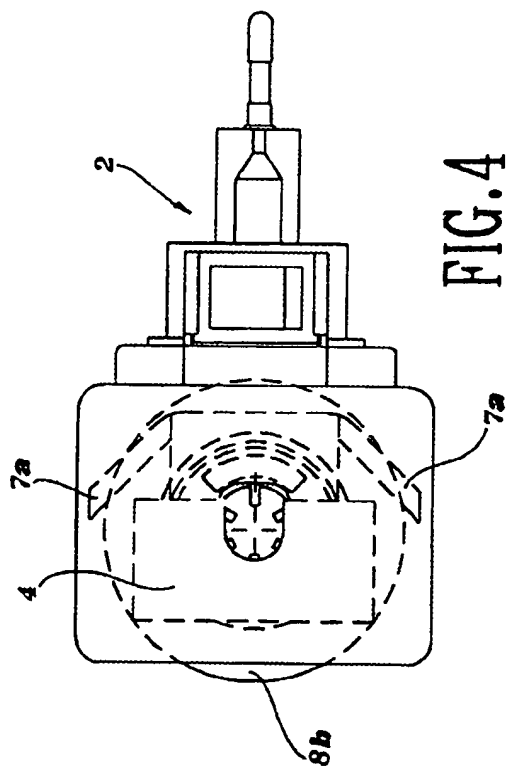


FIG. 4

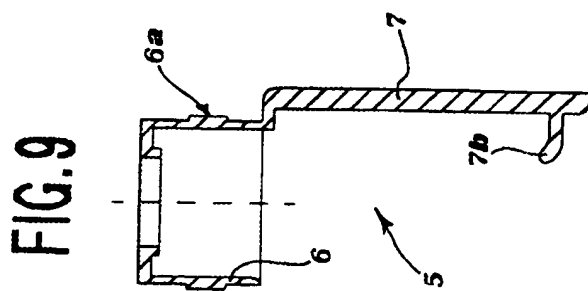


FIG. 9

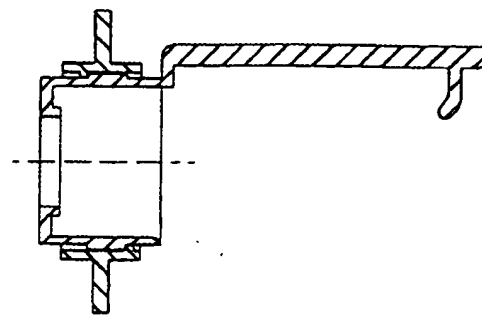


FIG. 11




FIG. 10



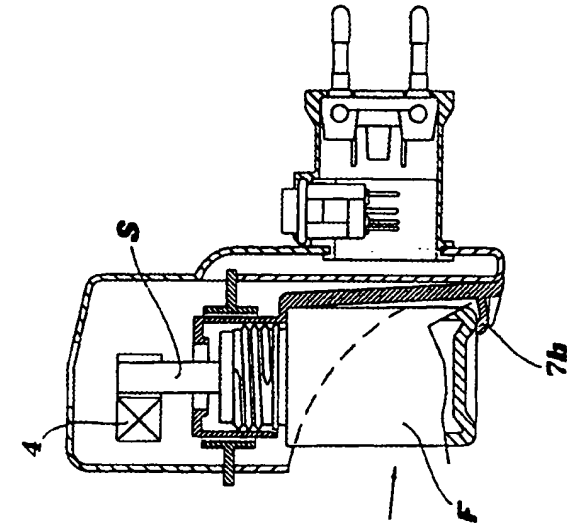


FIG. 12

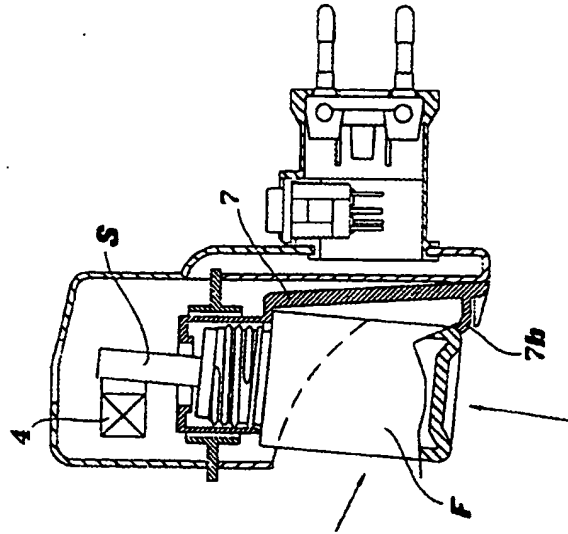


FIG. 13

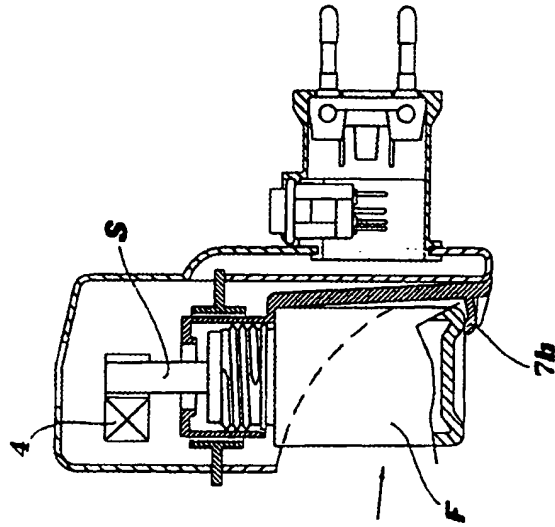


FIG. 14

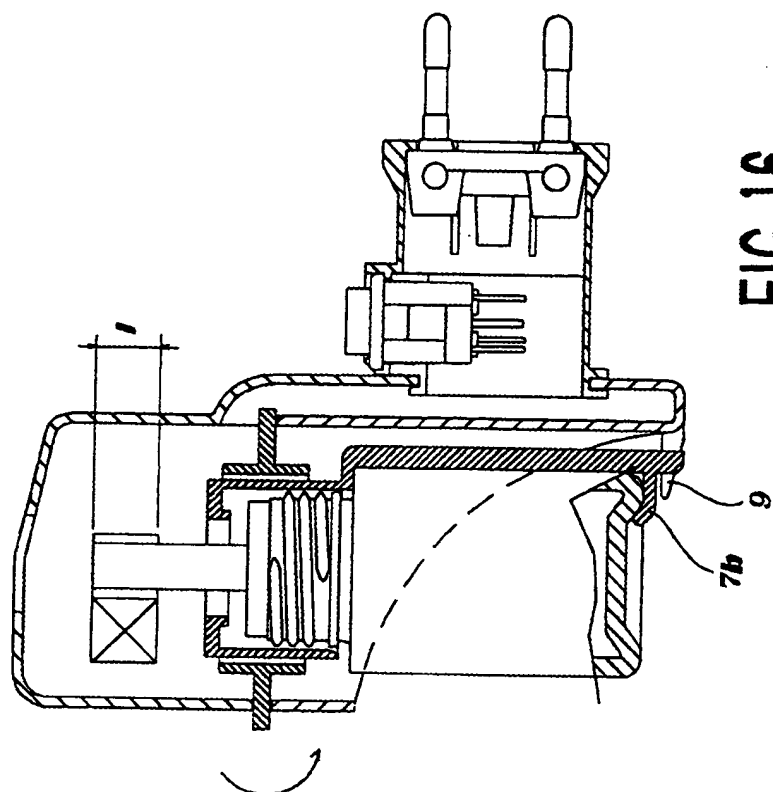


FIG. 16

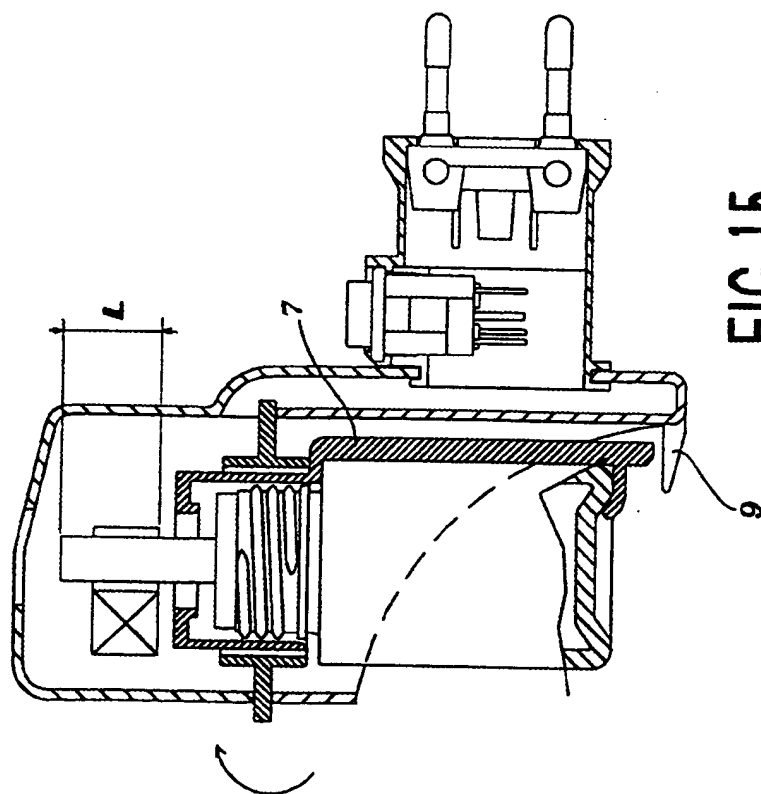


FIG. 15



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 0590

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	DE 297 14 848 U (BRUGGER GOTTFRIED ;MUELLER WOLFGANG (DE)) 30 October 1997 (1997-10-30) * page 4, paragraph 7 - page 5, paragraph 1 * * claims; figures *	1	A01M1/20 A61L9/03
D,A	WO 98 19526 A (ZOBEL IND CHIM) 14 May 1998 (1998-05-14) * claims; figures *	1	
A	GB 2 194 442 A (FUMAKILLA LTD) 9 March 1988 (1988-03-09) * page 2, line 31 - line 59; figures *	1	
A	EP 0 420 144 A (ZOBEL IND CHIM) 3 April 1991 (1991-04-03) * column 3, line 11 - column 4, line 47; figures 1-3 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A01M A61L
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>2 September 1999</b>	Examiner <b>Pirlou, J-C</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 0590

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-09-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 29714848 U	30-10-1997	NONE	
WO 9819526 A	14-05-1998	IT M1960733 U AU 6999898 A	07-05-1998 29-05-1998
GB 2194442 A	09-03-1988	JP 1913102 C JP 6036704 B JP 63063330 A JP 63074440 A AU 594495 B AU 7743787 A CN 1024739 B DE 3737272 A FR 2606595 A HK 74691 A KR 9506287 B US 4968487 A IT 1228951 B	09-03-1995 18-05-1994 19-03-1988 04-04-1988 08-03-1990 17-03-1988 01-06-1994 01-06-1988 20-05-1988 27-09-1991 13-06-1995 06-11-1990 10-07-1991
EP 0420144 A	03-04-1991	IT 1231085 B AT 103762 T DE 69007924 D DE 69007924 T JP 3206835 A US 5095647 A	12-11-1991 15-04-1994 11-05-1994 18-08-1994 10-09-1991 17-03-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82